

## Product Data Sheet

## DIAION™ PK216LH

DIAION™ PK216LH is a porous type strongly acidic cation exchange resin. It has 8% cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water and catalysts, is recommended.

## Product

Grade Name	DIAION™ PK216LH	
Type	Strong Acid Cation	
Matrix	Styrene-DVB, Porous	
Functional Group	Sulfonic Acid	
Ionic Form	H <sup>+</sup>	

## Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.6 min.
Water Content	%	50 - 60
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 425 µm	%	1 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.
Ionic Form Conversion H Form	eq%	95 min.

## Typical Properties

Shipping Density	g/L	760
Mean Particle Size	µm	750
Particle Density	g/mL	1.19
Total Swelling (Na <sup>+</sup> to H <sup>+</sup> )	%	8


## Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		HCl H <sub>2</sub> SO <sub>4</sub>
Regenerant Concentration	%	HCl 4 - 10 H <sub>2</sub> SO <sub>4</sub> 1 - 4
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 10
Total Rinse Requirement	BV	2 - 10




### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ PK216LH resin in normal down flow operation is shown in the graphs below.

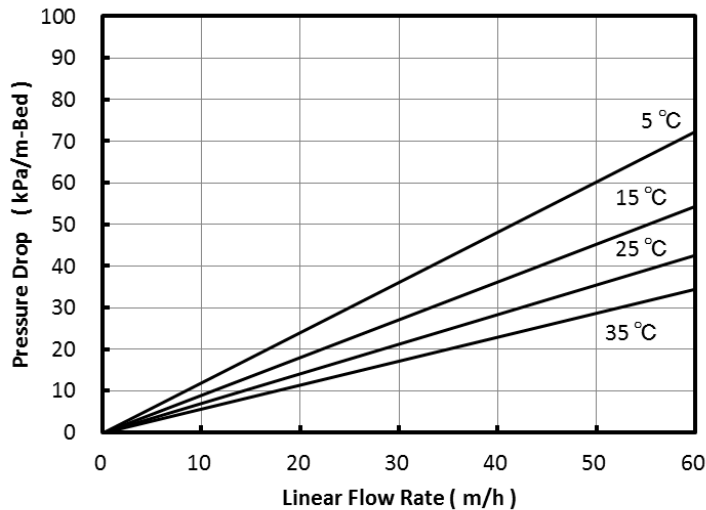

**Fig. 1 Pressure Drop of PK216LH**

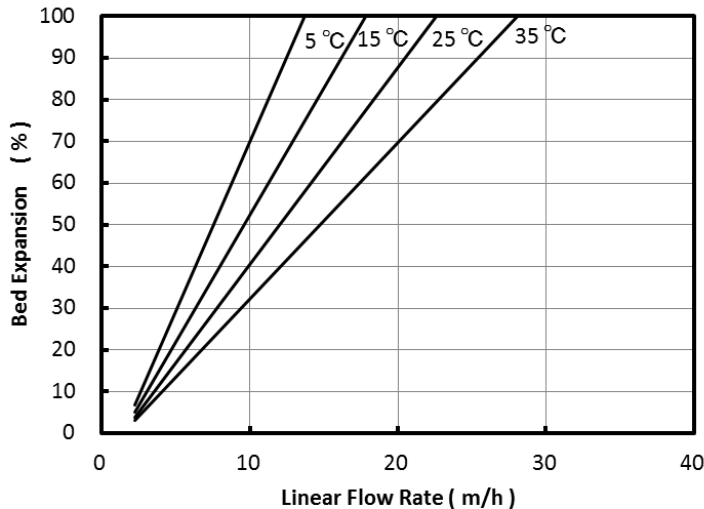

**Fig. 2 Bed Expansion of PK216LH**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.