DIAION™ SA20AOH

DIAION™ SA20AOH is a gel type strongly basic anion exchange resin. It is type II resin and has a standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

Product		
Grade Name		DIAION TM SA20AOH
Туре		Strong Base Anion
Matrix		Styrene-DVB, Gel
Functional Group	Type II (dimethylethanol ammonium groups)	
Ionic Form		OH ⁻
Specification		
Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	0.9 min.
Water Content	%	50 - 60
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 300 μm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	=	1.6 max.
Ionic Form Conversion (OH ⁻)	eq%	90 min.
Ionic Form Conversion (CO ₃ ²⁻)	eq%	10 max.
Ionic Form Conversion (Cl ⁻)	eq%	1 max.
Typical Properties		
Shipping Density	g/L	690
Mean Particle Size	μm	670
Particle Density	g/mL	1.08
Total Swelling (Cl to OH)	%	14



Recommended Operating Conditions

1 6	
Maximum Operating Temperature °C	60 (Cl ⁻)
	40 (OH ⁻)
Operating pH Range	0 - 14
Minimum Bed Depth mm	800
Service Flow Rate m/h	10 - 60
Regenerant	NaOH
Regenerant Concentration %	NaOH 2 - 8
Regenerant Level g/L	50 - 200
Regenerant Flow Rate m/h	2 - 8
Total Rince Requirement BV	2 - 10



DIAION™ SA20AOH

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAIONTM SA20AOH resin in normal down flow operation is shown in the graphs below.

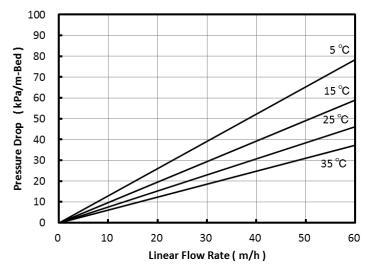


Fig. 1 Pressure Drop of SA20AOH

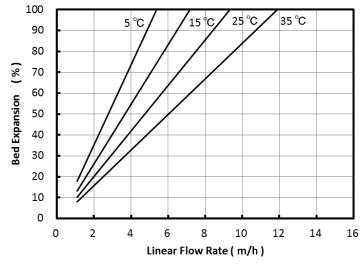


Fig. 2 Bed Expansion of SA20AOH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



Phone: 212-204-0075 Email: info@pyvot.tech Web: www.pyvot.tech