™ SK112 DIAION

DIAION™ SK112 is a gel type strongly acidic cation exchange resin. It has 12% cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

D	r	٦,	Αι.	IC.	t
г	ı۷	ソし	aυ	ı	ι

Product					
Grade Name		DIAION TM SK112			
Туре	Strong Acid Cation				
Matrix	Styrene-DVB, Gel				
Functional Group		Sulfonic acid			
Ionic Form		Na ⁺			
Specification		_			
Whole Bead Count	-	90 min.			
Salt Splitting Capacity	meq/mL	2.1 min.			
Water Content	%	32 - 42			
Particle Size Distribution on 1180 μm	%	5 max.			
Particle Size Distribution thr. 300 μm	%	1 max.			
Effective Size	mm	0.40 min.			
Uniformity Coefficient	-	1.6 max.			
Typical Properties					
Shipping Density	g/L	860			
Mean Particle Size	μm	690			
Particle Density	g/mL	1.34			
Total Swelling (Na ⁺ to H ⁺)	%	6			
Recommended Operating Conditions					
Maximum Operating Temperature	°C	120			
Operating pH Range		0 - 14			
Minimum Bed Depth	mm	800			
Service Flow Rate	m/h	10 - 40			
Regenerant		HCI			
		H_2SO_4			
Regenerant Concentration	%	HCl 4 - 10			
		H ₂ SO ₄ 1 - 4			
Regenerant Level	g/L	30 - 150			
Regenerant Flow Rate	m/h	2 - 10			
Total Rince Requirement	BV	2 - 10			



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAIONTM SK112 resin in normal down flow operation is shown in the graphs below.

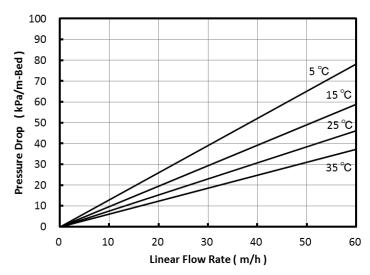


Fig. 1 Pressure Drop of SK112

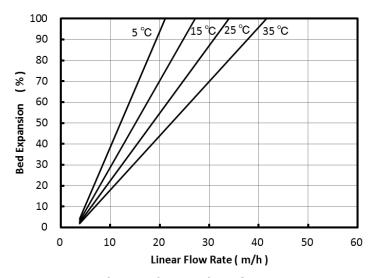


Fig. 2 Bed Expansion of SK112



Operational Capacity Data

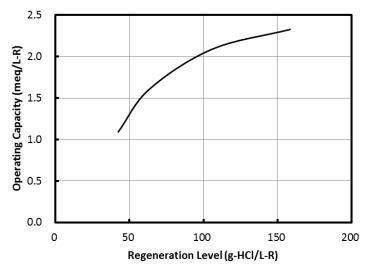


Fig. 3 Operational Capacity Data of SK112

Regenerant: 4 % HCl

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



Phone: 212-204-0075 Email: info@pyvot.tech Web: www.pyvot.tech