DIAION™ SK1B

DIAION™ SK1B is a gel type strongly acidic cation exchange resin. It has standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

P	ro	d	ш	ct
г	,	u	u	u

Product				
Grade Name		DIAION TM SK1B		
Туре		Strong Acid Cation		
Matrix		Styrene-DVB, Gel		
Functional Group		Sulfonic acid		
lonic Form		Na [†]		
Specification				
Whole Bead Count	_	90 min.		
Salt Splitting Capacity	meq/mL	2.0 min.		
Water Content	%	43 - 50		
Particle Size Distribution on 1180 μm	%	5 max.		
Particle Size Distribution thr. 300 μm	%	1 max.		
Effective Size	mm	0.40 min.		
Uniformity Coefficient	-	1.6 max.		
Typical Properties				
Shipping Density	g/L	840		
Mean Particle Size	μm	750		
Particle Density	g/mL	1.28		
Total Swelling (Na ⁺ to H ⁺)	%	9		
Recommended Operating Conditions				
Maximum Operating Temperature	°C	120		
Operating pH Range		0 - 14		
Minimum Bed Depth	mm	800		
Service Flow Rate	m/h	10 - 40		
Regenerant		HCl		
		H_2SO_4		
Regenerant Concentration	%	HCl 4 - 10		
		H ₂ SO ₄ 1 - 4		
Regenerant Level	g/L	30 - 150		
Regenerant Flow Rate	m/h	2 - 10		
Total Rince Requirement	BV	2 - 10		



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of $\mathsf{DIAION}^\mathsf{TM}$ SK1B resin in normal down flow operation is shown in the graphs below.

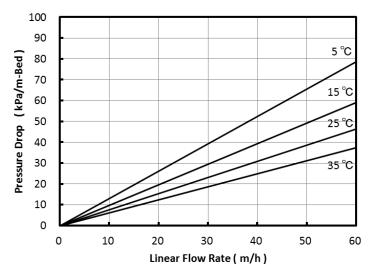


Fig. 1 Pressure Drop of SK1B

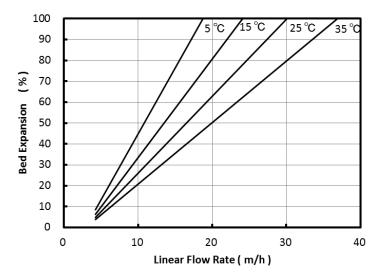


Fig. 2 Bed Expansion of SK1B



Operational Capacity Data

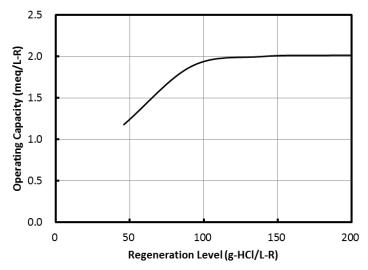


Fig. 3 Operational Capacity Data of SK1B

Regenerant: 4 % HCI

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



Phone: 212-204-0075 Email: info@pyvot.tech Web: www.pyvot.tech