

Product Data Sheet

DIAION™ UBK522M

DIAION™ UBK522M is a high quality uniform particle size cation exchange resin. It has 5% crosslinkage and excellent properties for industrial applications. It is recommended for industrial pharmaceuticals, fermentation and food fields.

Product

Grade Name	DIAION™ UBK522M
Type	Strong Acid Cation
Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid
Ionic Form	K ⁺

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.6 min.
Water Content	%	47 - 52
Water Content (H form)	%	61.0 - 63.0
Mean Particle Size	μm	290 - 320
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion (K ⁺)	eq%	98 min.

Typical Properties

Shipping Density	g/L	810
Particle Density	g/mL	1.25

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14



Phone: 212-204-0075
 Email: info@pyvot.tech
 Web: www.pyvot.tech

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK522M resin in normal down flow operation is shown in the graphs below.

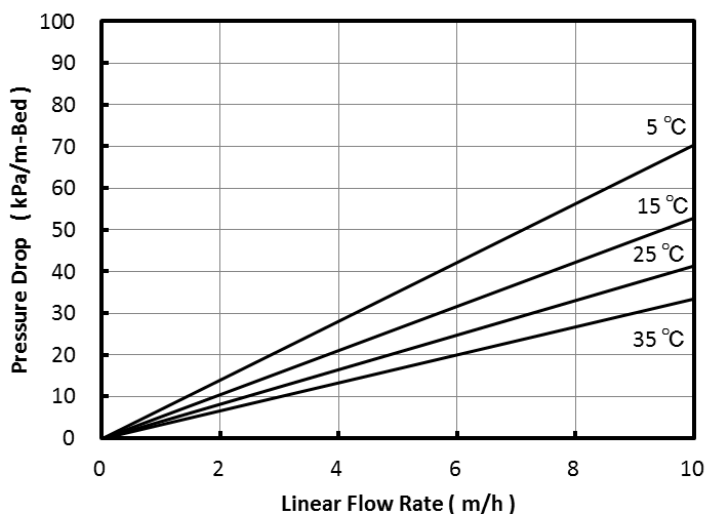


Fig. 1 Pressure Drop of UBK522M

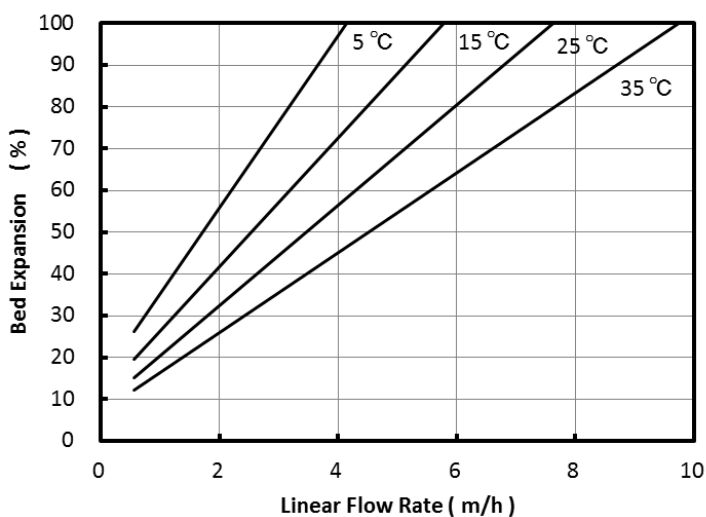


Fig. 2 Bed Expansion of UBK522M

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

