

Product Data Sheet

DIAION™ UBK530J

DIAION™ UBK530J is a high quality uniform particle size cation exchange resin. It has standard cross-linkage and excellent properties for industrial applications. It is recommended for industrial pharmaceuticals, fermentation and food fields.

Product

Grade Name	DIAION™ UBK530J	
Type	Strong Acid Cation	
Matrix	Styrene-DVB, Gel	
Functional Group	Sulfonic acid	
Ionic Form	Na ⁺	

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.6 min.
Water Content	%	52.0 - 55.5
Particle Size Distribution 250 - 310 μm	%	85 min.
Uniformity Coefficient	-	1.10 max.

Typical Properties

Shipping Density	g/L	830
Particle Density	g/mL	1.22
Mean Particle Size	μm	280
Total Swelling (Na ⁺ to H ⁺)	%	10

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14



Phone: 212-204-0075
 Email: info@pyvot.tech
 Web: www.pyvot.tech

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK530J resin in normal down flow operation is shown in the graphs below.

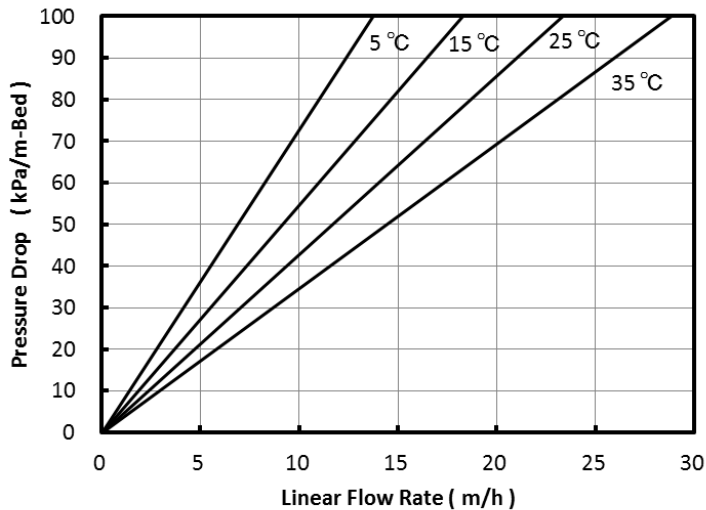


Fig. 1 Pressure Drop of UBK530J

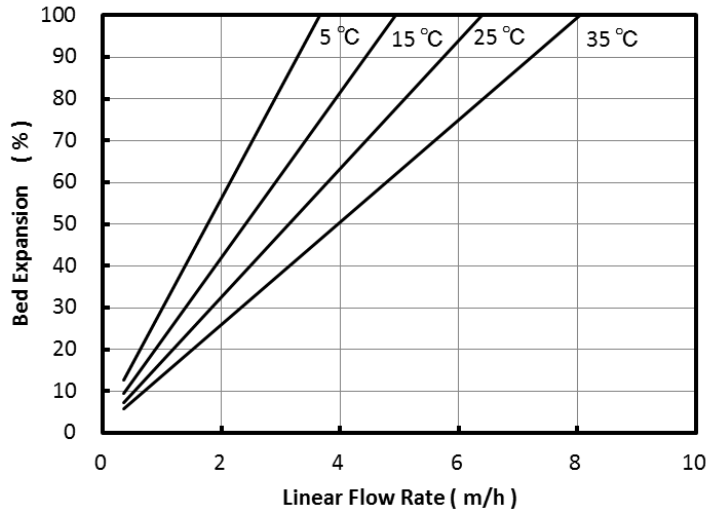


Fig. 2 Bed Expansion of UBK530J

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

