

Product Data Sheet

DIAION™ UBK550

DIAION™ UBK550 is a high quality uniform particle size cation exchange resin. It has 8% crosslinkage and excellent properties for industrial applications. It is recommended for industrial pharmaceuticals, fermentation and food fields.

Product

Grade Name	DIAION™ UBK550	
Type	Strong Acid Cation	
Matrix	Styrene-DVB, Gel	
Functional Group	Sulfonic acid	
Ionic Form	Na ⁺	

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.9 min.
Water Content	%	46.0 - 49.5
Particle Size Distribution 200 - 240 µm	%	85 min.

Typical Properties

Shipping Density	g/L	850
Particle Density	g/mL	1.28
Mean Particle Size	µm	220
Uniformity Coefficient	-	1.04
Total Swelling (Na ⁺ to H ⁺)	%	9

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK550 resin in normal down flow operation is shown in the graphs below.

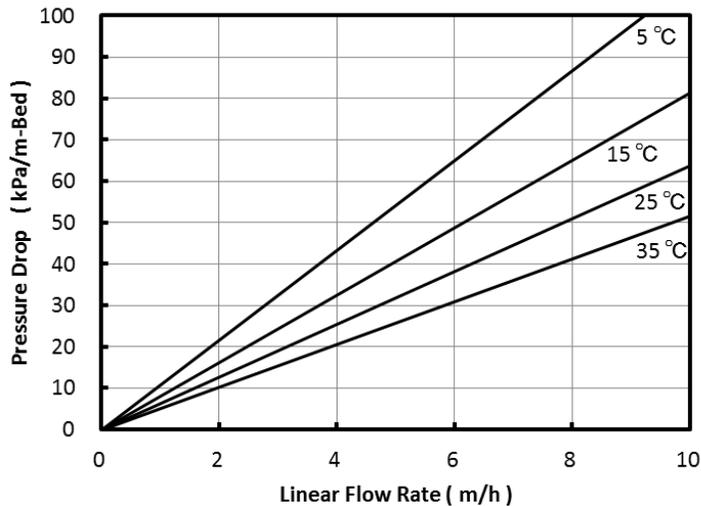


Fig. 1 Pressure Drop of UBK550

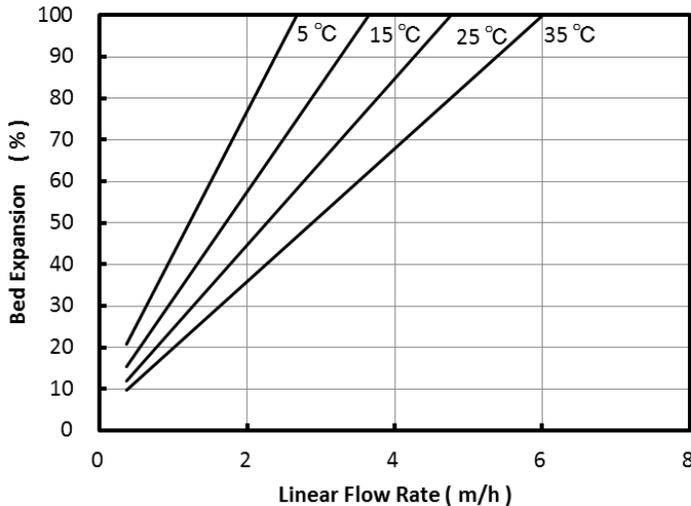


Fig. 2 Bed Expansion of UBK550

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

