

Product Data Sheet

DIAION™ WA10

DIAION™ WA10 is an acrylic type weakly basic anion exchange resin. It has tertiary amine functionality with high regeneration efficiency. A wide range of applications, especially in a field of pretreatment of starch hydrolysates containing purification of dextrose, beet sugar solutions, and formaldehyde, is recommended.

Product

Grade Name	DIAION™ WA10	
Type	Weak Base Anion	
Matrix	Acrylic-DVB, Gel	
Functional Group	Tertiary Amine	
Ionic Form	Free Base	

Specification

Whole Bead Count	-	90 min.
Total Exchange Capacity	meq/mL	1.2 min.
Water Content	%	63 - 69
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 300 µm	%	1 max.
Effective Size	mm	0.35 min.
Uniformity Coefficient	-	1.6 max.

Typical Properties

Shipping Density	g/L	690
Mean Particle Size	µm	510
Particle Density	g/mL	1.05
Total Swelling (FB to Cl ⁻)	%	22

Recommended Operating Conditions

Maximum Operating Temperature	°C	60
Operating pH Range		0 - 9
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		NaOH
Regenerant Concentration	%	NaOH 1 - 4
Regenerant Level	% of ionic load	120
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	5 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA10 resin in normal down flow operation is shown in the graphs below.

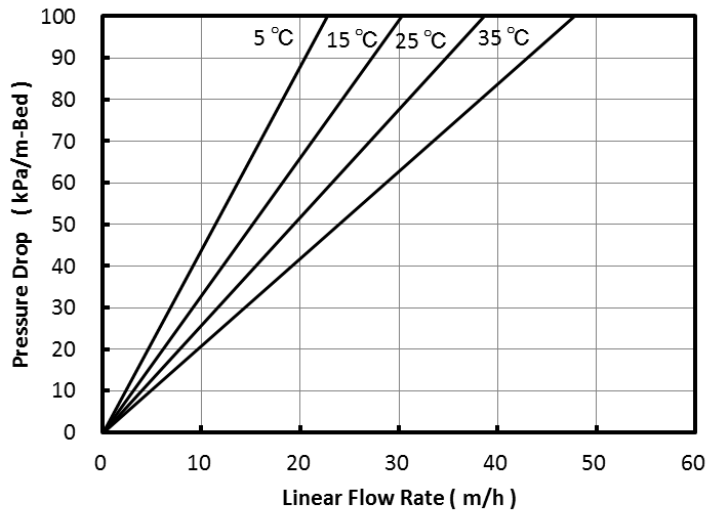


Fig. 1 Pressure Drop of WA10

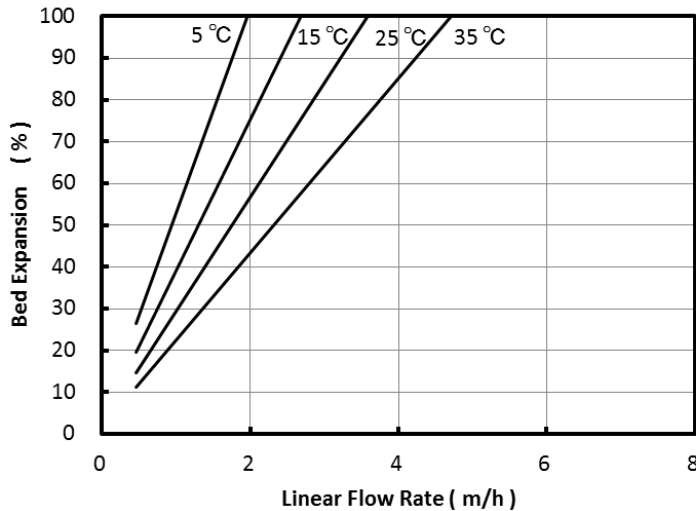


Fig. 2 Bed Expansion of WA10

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.