

Product Data Sheet

DIAION™ WA20

DIAION™ WA20 is a polyamine type weakly basic anion exchange resin. It has higher total anion exchange capacity with high regeneration efficiency. A wide range of applications, especially in a field of removal of strong mineral acids in water treatment, is recommended.

Product

Grade Name	DIAION™ WA20
Type	Weak Base Anion
Matrix	Styrene-DVB, Porous
Functional Group	Polyamine
Ionic Form	Free Base

Specification

Whole Bead Count	-	95 min.
Total Exchange Capacity	meq/mL	2.5 min.
Water Content	%	39 - 45
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 300 µm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	-	1.6 max.

Typical Properties

Shipping Density	g/L	660
Mean Particle Size	µm	570
Particle Density	g/mL	1.08
Total Swelling (FB to Cl ⁻)	%	19

Recommended Operating Conditions

Maximum Operating Temperature	°C	100
Operating pH Range		0 - 9
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		NaOH
Regenerant Concentration	%	NaOH 1 - 4
Regenerant Level	% of ionic load	120
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	5 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA20 resin in normal down flow operation is shown in the graphs below.

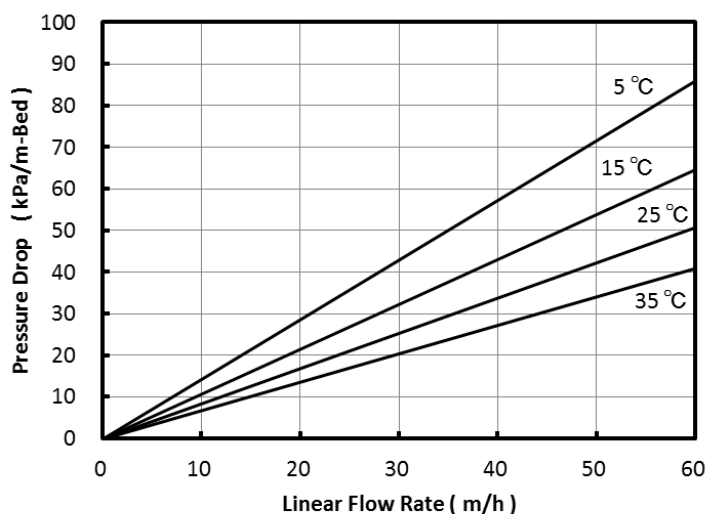


Fig. 1 Pressure Drop of WA20

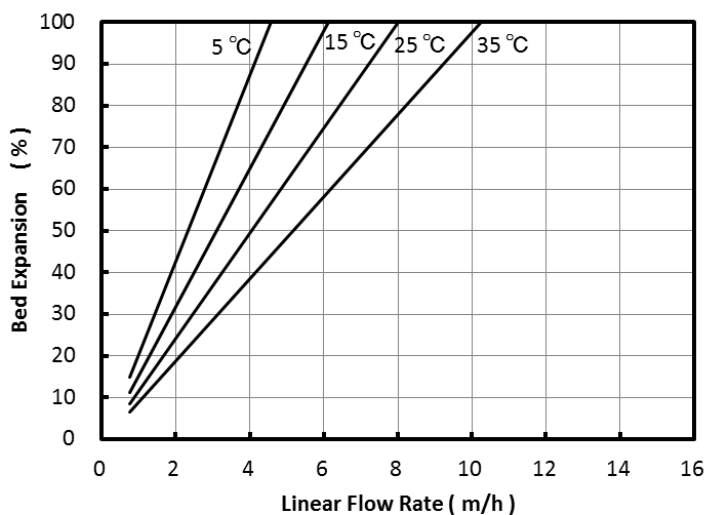


Fig. 2 Bed Expansion of WA20

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.