

## Product Data Sheet

## DIAION™ WA21J

DIAION™ WA21J is a polyamine type weakly basic anion exchange resin. It has higher total anion exchange capacity with high regeneration efficiency and excellent mechanical strength. A wide range of applications, especially in a field of removal of strong mineral acids in water treatment, is recommended.

## Product

Grade Name	DIAION™ WA21J	
Type	Weak Base Anion	
Matrix	Styrene-DVB, Porous	
Functional Group	Polyamine	
Ionic Form	Free Base	

## Specification

Whole Bead Count	-	95 min.
Total Exchange Capacity	meq/mL	2.0 min.
Water Content	%	40 - 52
Particle Size Distribution on 1180 µm	%	5 max.
Particle Size Distribution thr. 300 µm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	-	1.6 max.

## Typical Properties

Shipping Density	g/L	650
Mean Particle Size	µm	610
Particle Density	g/mL	1.07
Total Swelling (FB to Cl <sup>-</sup> )	%	23


## Recommended Operating Conditions

Maximum Operating Temperature	°C	100
Operating pH Range		0 - 9
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		NaOH
Regenerant Concentration	%	NaOH 1 - 4
Regenerant Level	% of ionic load	120
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	5 - 10




### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA21J resin in normal down flow operation is shown in the graphs below.

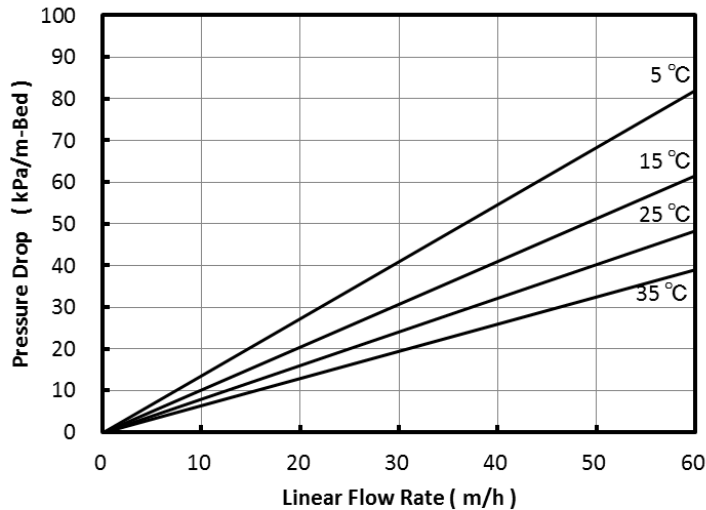

**Fig. 1 Pressure Drop of WA21J**

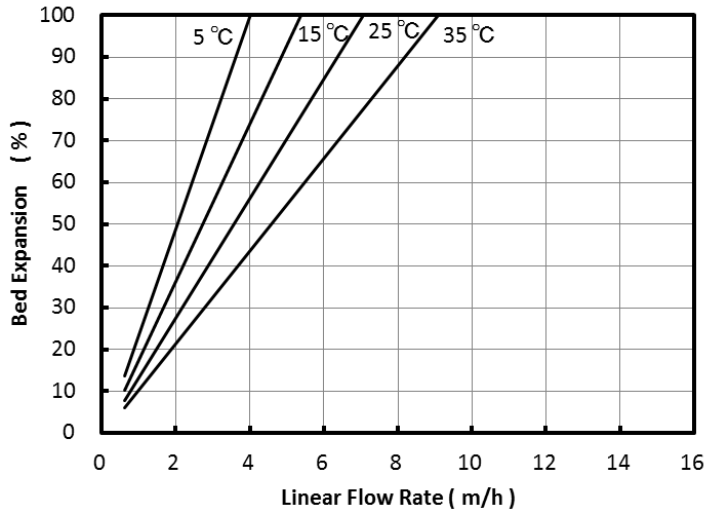

**Fig. 2 Bed Expansion of WA21J**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.