

## Product Data Sheet

## DIAION™ WA55

DIAION™ WA55 is a porous type weakly basic anion exchange resin. It has tertiary amine and quaternary ammonium functionality. A wide range of applications, especially in a field of demineralization of food and beverage, especially whey products, is recommended.

## Product

Grade Name	DIAION™ WA55
Type	Weak Base Anion
Matrix	Styrene-DVB, Porous
Functional Group	Tertiary / Quaternary Amine
Ionic Form	Cl <sup>-</sup>

## Specification

Whole Bead Count	-	90 min.
Water Content	%	60 - 65
Volume Change (Cl/OH)	-	1.2 max.
Total Capacity	meq/mL	1.1 - 1.3
Salt Splitting Capacity	meq/mL	0.6 - 0.7
Salt Splitting Ratio	%	50 - 60
α-LA Adsorption	g/L-R	1.0 max.
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 300 μm	%	1 max.
Effective Size	mm	0.40 min.
Uniformity Coefficient	-	1.6 max.

## Typical Properties

Shipping Density	g/L	690
Mean Particle Size	μm	600
Particle Density	g/mL	1.07


## Recommended Operating Conditions

Maximum Operating Temperature	°C	100
Operating pH Range		0 - 9
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		NaOH
Regenerant Concentration	%	NaOH 1 - 4
Regenerant Level	% of ionic load	120
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	5 - 10




### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA55 resin in normal down flow operation is shown in the graphs below.

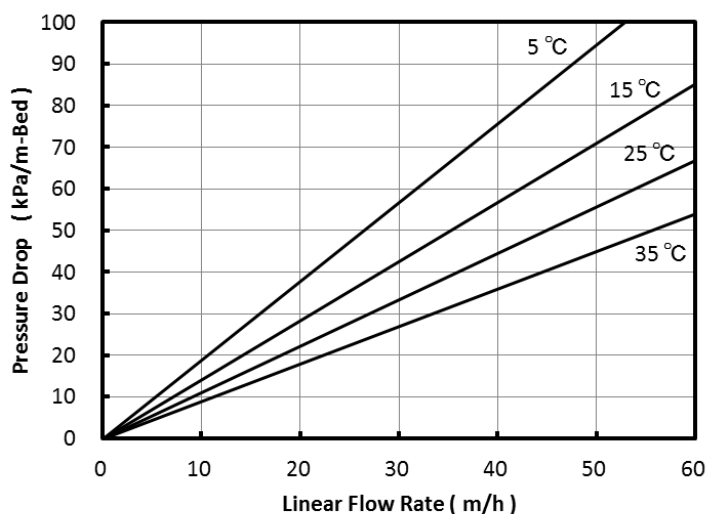

**Fig. 1 Pressure Drop of WA55**

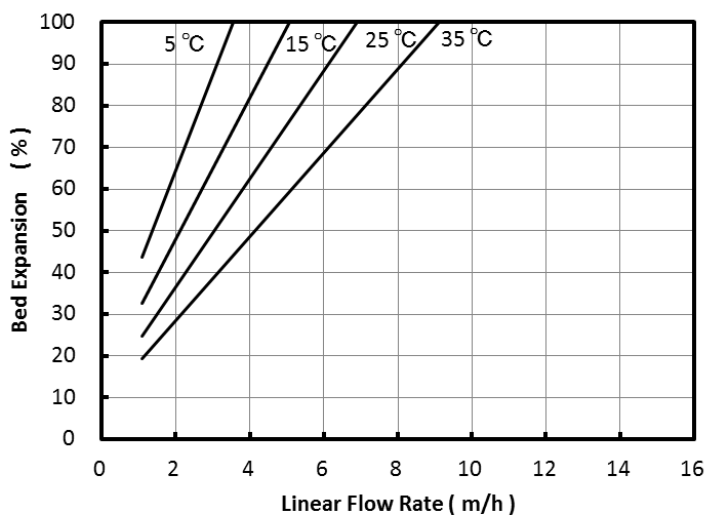

**Fig. 2 Bed Expansion of WA55**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

