

Product Data Sheet

DIAION™ WK40L

DIAION™ WK40L is an acrylic-type weakly acidic cation exchange resin. It has a higher total capacity than methacrylic type resins. A wide range of applications, especially in a field of dealkylation, demineralization and waste water treatment, is recommended.

Product

Grade Name	DIAION™ WK40L	
Type	Weak Acid Cation	
Matrix	Acrylic, Porous	
Functional Group	Carboxylic Acid	
Ionic Form	H ⁺	

Specification

Whole Bead Count	-	95 min.
Total Capacity	meq/mL	4.4 min.
Water Content	%	41 - 48
Particle Size Distribution on 1180 µm	%	10 max.
Particle Size Distribution thr. 425 µm	%	3 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.

Typical Properties

Shipping Density	g/L	770
Mean Particle Size	µm	640
Particle Density	g/mL	1.19
Total Swelling (H ⁺ to Na ⁺)	%	73

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		4 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	5 - 40
Regenerant		HCl
Regenerant Concentration	%	HCl 1 - 5
Regenerant Level	% of ionic load	110
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	10 - 20



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WK40L resin in normal down flow operation is shown in the graphs below.

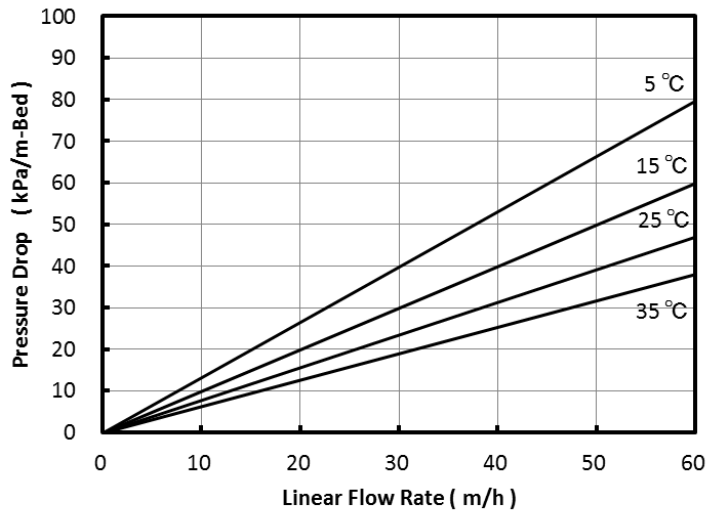


Fig. 1 Pressure Drop of WK40L

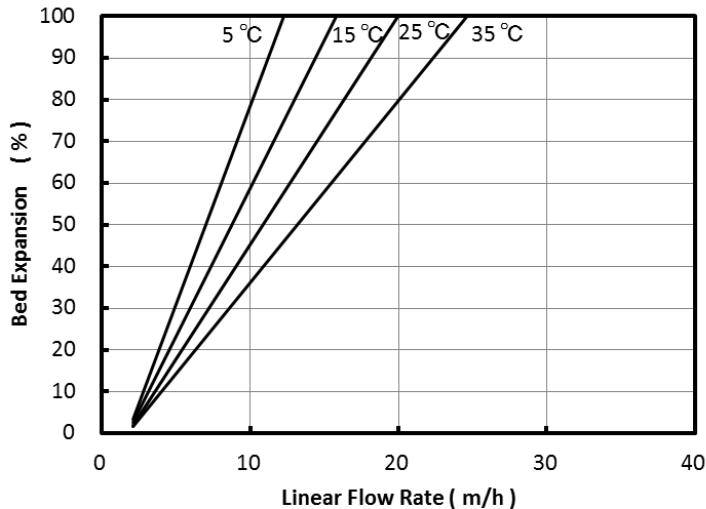


Fig. 2 Bed Expansion of WK40L

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

