## **Product Data Sheet**

# DIAION<sup>™</sup> SK112

DIAION<sup>™</sup> SK112 is a gel type strongly acidic cation exchange resin. It has 12% cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.


Grade Name		DIAION <sup>™</sup> SK112
Туре		Strong Acid Catior
Matrix		Styrene-DVB, Ge
Functional Group		Sulfonic acid
Ionic Form		Na
Specification		
Whole Bead Count	-	90 min
Salt Splitting Capacity	meq/mL	2.1 min
Water Content	%	32 - 42
Particle Size Distribution on 1180 $\mu m$	%	5 max
Particle Size Distribution thr. 300 $\mu m$	%	1 max
Effective Size	mm	0.40 min
Uniformity Coefficient	-	1.6 max
Typical Properties		
Shipping Density	g/L	860
Mean Particle Size	μm	690
Particle Density	g/mL	1.34
Total Swelling (Na <sup>+</sup> to $H^+$ )	%	
	-	
Recommended Operating Condit	-	(
Recommended Operating Condit	ions	120
Recommended Operating Condit Maximum Operating Temperature	ions	120 0 - 14 800
Recommended Operating Condit Maximum Operating Temperature Operating pH Range	ions °C	120 0 - 14
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth	ions °C mm	120 0 - 14 800 10 - 40
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth Service Flow Rate	ions °C mm	120 0 - 14 800 10 - 40 HC
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth Service Flow Rate Regenerant	ions °C mm m/h	120 0 - 14 800
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth Service Flow Rate	ions °C mm	120 0 - 14 800 10 - 40 HC H <sub>2</sub> SO
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth Service Flow Rate Regenerant Regenerant Concentration	ions °C mm m/h %	120 0 - 14 800 10 - 40 HC H2SO HCI 4 - 10 H2SO <sub>4</sub> 1 - 4
Recommended Operating Condit Maximum Operating Temperature Operating pH Range Minimum Bed Depth Service Flow Rate Regenerant	ions °C mm m/h	120 0 - 14 800 10 - 40 HC H <sub>2</sub> SO HCI 4 - 10




Phone: 212-204-0075 Email: info@pyvot.tech Web: www.pyvot.tech

#### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of  $DIAION^{TM}$  SK112 resin in normal down flow operation is shown in the graphs below.

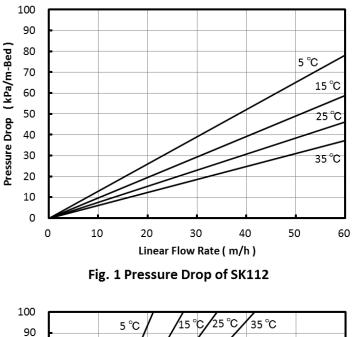

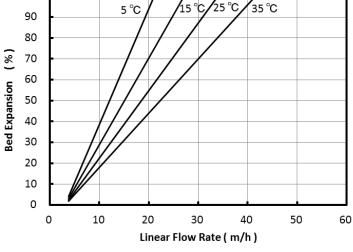






# Product Data Sheet DIAION<sup>™</sup> SK112

# **Operational Capacity Data**

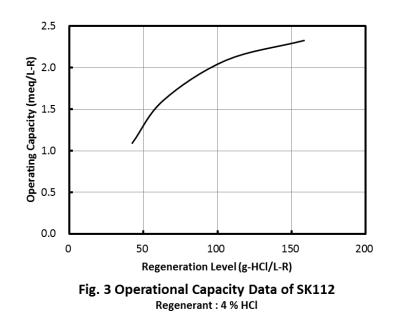

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

