

## Product Data Sheet

**DIAION™ SKT110L**

DIAION™ SKT110L is a gel type strongly acidic cation exchange resin. It has a 10% cross-linkages and shows lower TOC leakage. It is recommended for UPW application.

### Product

---

Grade Name	DIAION™ SKT110L
Type	Strong Acid Cation
Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid
Ionic Form	H <sup>+</sup>

---

### Specification

---

Color and Shape	-	Brown Translucent Beads
Salt Splitting Capacity	meq/mL	1.9 min.
Water Content	%	40 - 50
Particle Size Distribution on 1180 μm	%	5 max.
Particle Size Distribution thr. 425 μm	%	1 max.
Effective Size	mm	0.45 min.
Uniformity Coefficient	-	1.6 max.
Ionic Form Conversion (H <sup>+</sup> )	eq%	99.9 min.
ΔTOC	ppb	20 max.
Outlet Resistivity	MΩ·cm	12 min.

---

### Typical Properties

---

Shipping Density	g/L	800
Mean Particle Size	μm	740
Particle Density	g/mL	1.23
Total Swelling (Na <sup>+</sup> to H <sup>+</sup> )	%	8

---



## Product Data Sheet

## DIAION™ SKT110L


## Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		HCl H <sub>2</sub> SO <sub>4</sub>
Regenerant Concentration	%	HCl 4 - 10 H <sub>2</sub> SO <sub>4</sub> 1 - 4
Regenerant Level	g/L	30 - 150
Regenerant Flow Rate	m/h	2 - 10
Total Rinse Requirement	BV	2 - 10




### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ SKT110L resin in normal down flow operation is shown in the graphs below.

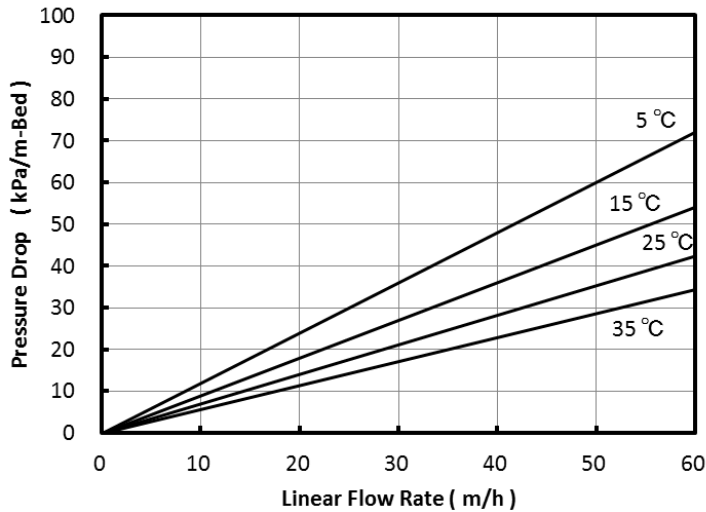

**Fig. 1 Pressure Drop of SKT110L**

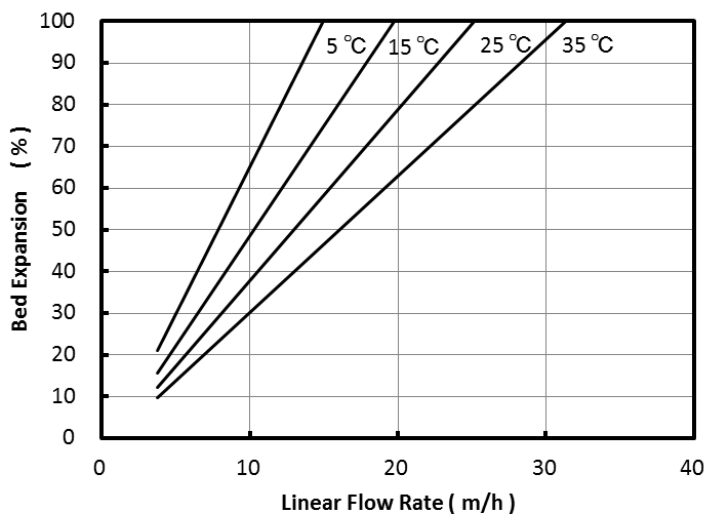

**Fig. 2 Bed Expansion of SKT110L**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.