

Product Data Sheet

DIAION™ UBA100OH

DIAION™ UBA100OH is an anion exchange resin with a uniform particle size. It has a standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

Product

Grade Name	DIAION™ UBA100OH	
Type	Strong Base Anion	
Matrix	Styrene-DVB, Gel	
Functional Group	Type I (trimethyl ammonium groups)	
Ionic Form	OH ⁻	

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	1.0 min.
Water Content	%	59 - 65
Mean Particle Size	μm	590 ± 50
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion (OH ⁻)	eq%	90 min.
Ionic Form Conversion (Cl ⁻)	eq%	1 max.

Typical Properties

Shipping Density	g/L	670
Particle Density	g/mL	1.07
Total Swelling (Cl ⁻ to OH ⁻)	%	23

Recommended Operating Conditions

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBA100OH resin in normal down flow operation is shown in the graphs below.

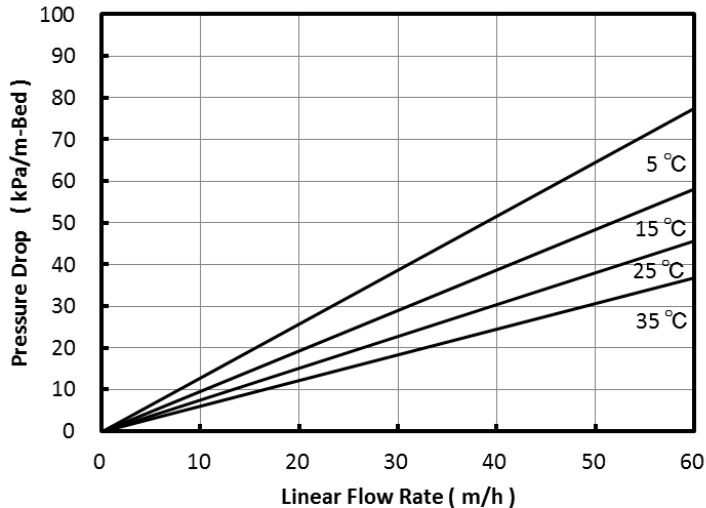


Fig. 1 Pressure Drop of UBA100OH

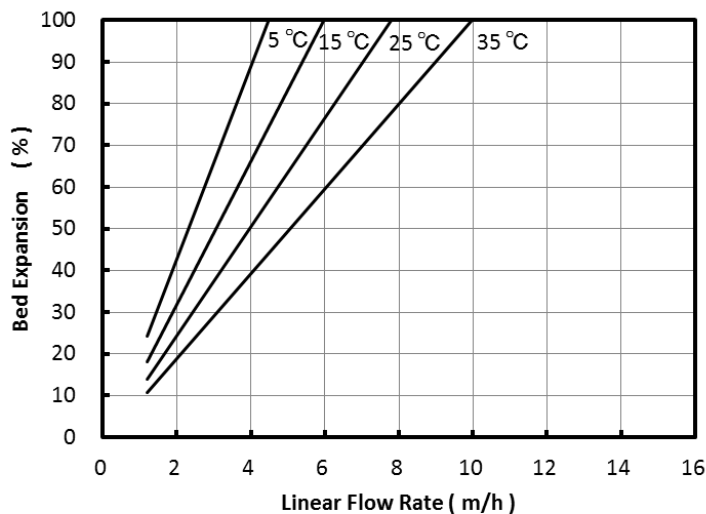


Fig. 2 Bed Expansion of UBA100OH

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.