

Product Data Sheet

DIAION™ UBA1200HUP

DIAION™ UBA1200HUP is an anion exchange resin with a uniform particle size. It has a standard cross-linkages and anti-clumping characteristics and excellent properties. It is recommended for higher purity water treatment application.

Product

Grade Name	DIAION™ UBA1200HUP	
Type	Strong Base Anion	
Matrix	Styrene-DVB, Gel	
Functional Group	Type I (trimethyl ammonium groups)	
Ionic Form	OH ⁻	

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	1.0 min.
Water Content	%	62 - 70
Mean Particle Size	µm	620 ± 50
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion (OH ⁻)	eq%	90 min.
Ionic Form Conversion (Cl ⁻)	eq%	1 max.
ΔTOC	ppb	20 max.
Outlet resistivity	MΩ·cm	15 min.

Typical Properties

Shipping Density	g/L	655
Particle Density	g/mL	1.07
Total Swelling (Cl ⁻ to OH ⁻)	%	24

Recommended Operating Conditions

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBA120OHUP resin in normal down flow operation is shown in the graphs below.

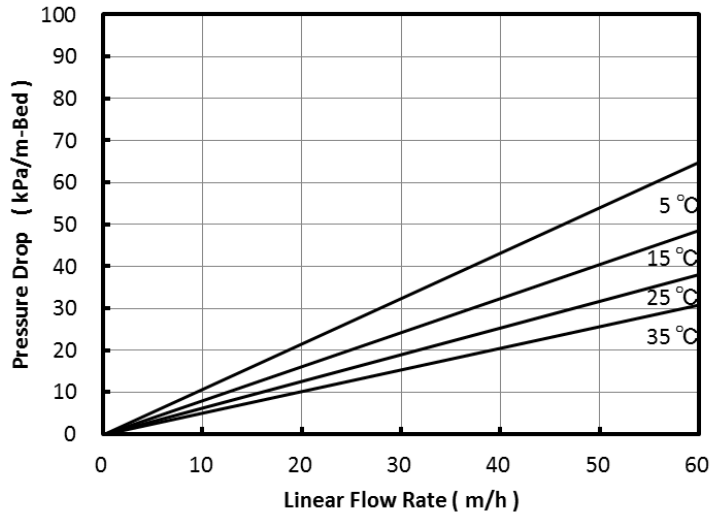


Fig. 1 Pressure Drop of UBA120OHUP

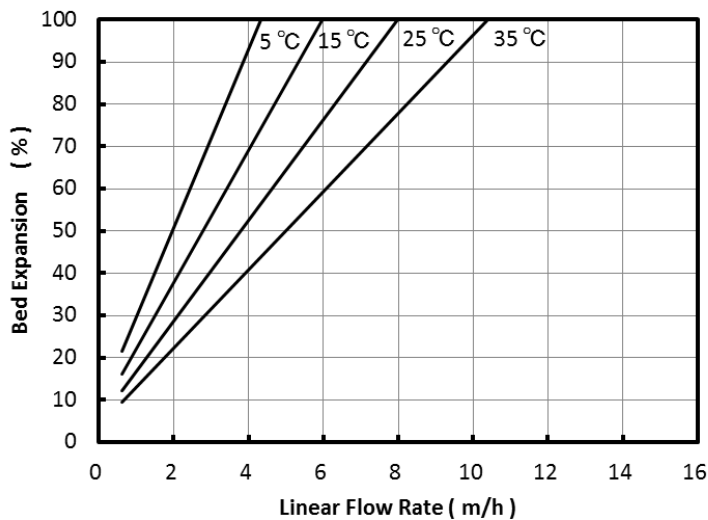


Fig. 2 Bed Expansion of UBA120OHUP

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.