

## Product Data Sheet

## DIAION™ UBA150

DIAION™ UBA150 is an anion exchange resin with a uniform particle size. It has a higher cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

## Product

|                  |                                    |
|------------------|------------------------------------|
| Grade Name       | DIAION™ UBA150                     |
| Type             | Strong Base Anion                  |
| Matrix           | Styrene-DVB, Gel                   |
| Functional Group | Type I (trimethyl ammonium groups) |
| Ionic Form       | Cl <sup>-</sup>                    |

## Specification

|                         |        |           |
|-------------------------|--------|-----------|
| Whole Bead Count        | -      | 95 min.   |
| Salt Splitting Capacity | meq/mL | 1.4 min.  |
| Water Content           | %      | 39 - 45   |
| Mean Particle Size      | μm     | 600 ± 50  |
| Uniformity Coefficient  | -      | 1.10 max. |

## Typical Properties

|                                                      |      |      |
|------------------------------------------------------|------|------|
| Shipping Density                                     | g/L  | 700  |
| Particle Density                                     | g/mL | 1.08 |
| Total Swelling (Cl <sup>-</sup> to OH <sup>-</sup> ) | %    | 22   |


## Recommended Operating Conditions

|                               |     |                                                |
|-------------------------------|-----|------------------------------------------------|
| Maximum Operating Temperature | °C  | 80 (Cl <sup>-</sup> )<br>60 (OH <sup>-</sup> ) |
| Operating pH Range            |     | 0 - 14                                         |
| Minimum Bed Depth             | mm  | 800                                            |
| Service Flow Rate             | m/h | 10 - 60                                        |
| Regenerant                    |     | NaOH                                           |
| Regenerant Concentration      | %   | NaOH 2 - 8                                     |
| Regenerant Level              | g/L | 50 - 200                                       |
| Regenerant Flow Rate          | m/h | 2 - 8                                          |
| Total Rinse Requirement       | BV  | 2 - 10                                         |




### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBA150 resin in normal down flow operation is shown in the graphs below.

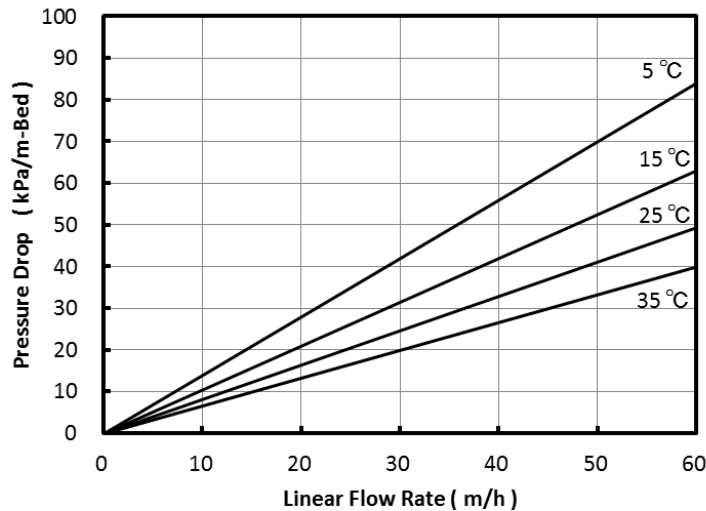

**Fig. 1 Pressure Drop of UBA150**

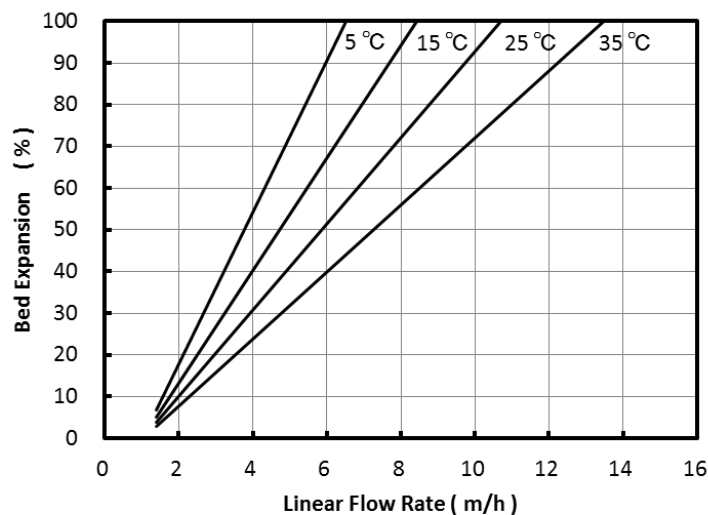

**Fig. 2 Bed Expansion of UBA150**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

