


Applications of SCK01 Column

Separation of standard cations on MCI GEL™ SCK01 column

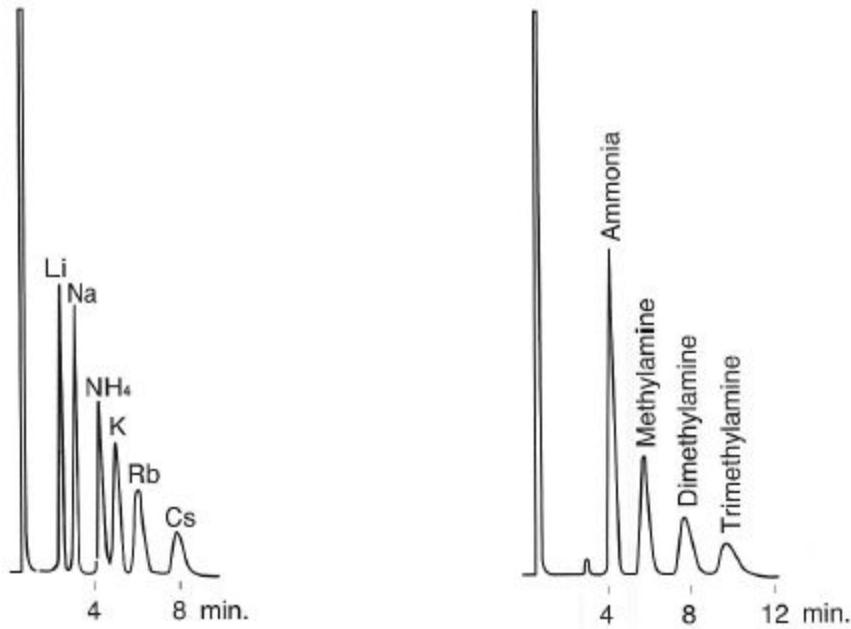

Conditions
Column : MCI GEL® SCK01 6mm I.D.×50mm
Eluent : 5mM HNO₃
Flow rate : 1.0 mL/min
Column temp. : 40°C
Detection : Conductivity (Fig. 3-1, 3-2, 3-3, 3-4, 3-5) 254nm (Fig. 3-6)