

Product Data Sheet

DIAION™ WA30LL

DIAION™ WA30LL is a highly porous type weakly basic anion exchange resin. It has tertiary amine functionality with high regeneration efficiency. A wide range of applications, especially in a field of removal of organic substances, pretreatment of raw waters containing organic foulants, deionization and decolorization of starch hydrolysates, is recommended.

Product

| | | |
|------------------|----------------------------|--|
| Grade Name | DIAION™ WA30LL | |
| Type | Weak Base Anion | |
| Matrix | Styrene-DVB, Highly Porous | |
| Functional Group | Tertiary Amine | |
| Ionic Form | Free Base | |

Specification

| | | |
|--|--------|-----------|
| Whole Bead Count | - | 95 min. |
| Total Exchange Capacity | meq/mL | 1.5 min. |
| Water Content | % | 43 - 55 |
| Particle Size Distribution on 1180 µm | % | 5 max. |
| Particle Size Distribution thr. 425 µm | % | 1 max. |
| Effective Size | mm | 0.45 min. |
| Uniformity Coefficient | - | 1.6 max. |

Typical Properties

| | | |
|---|------|------|
| Shipping Density | g/L | 630 |
| Mean Particle Size | µm | 710 |
| Particle Density | g/mL | 1.05 |
| Total Swelling (FB to Cl ⁻) | % | 22 |

Recommended Operating Conditions

| | | |
|-------------------------------|-----------------|------------|
| Maximum Operating Temperature | °C | 100 |
| Operating pH Range | | 0 - 9 |
| Minimum Bed Depth | mm | 800 |
| Service Flow Rate | m/h | 10 - 40 |
| Regenerant | | NaOH |
| Regenerant Concentration | % | NaOH 1 - 4 |
| Regenerant Level | % of ionic load | 120 |
| Regenerant Flow Rate | m/h | 2 - 6 |
| Total Rinse Requirement | BV | 5 - 10 |



Phone: 212-204-0075
 Email: info@pyvot.tech
 Web: www.pyvot.tech

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WA30LL resin in normal down flow operation is shown in the graphs below.

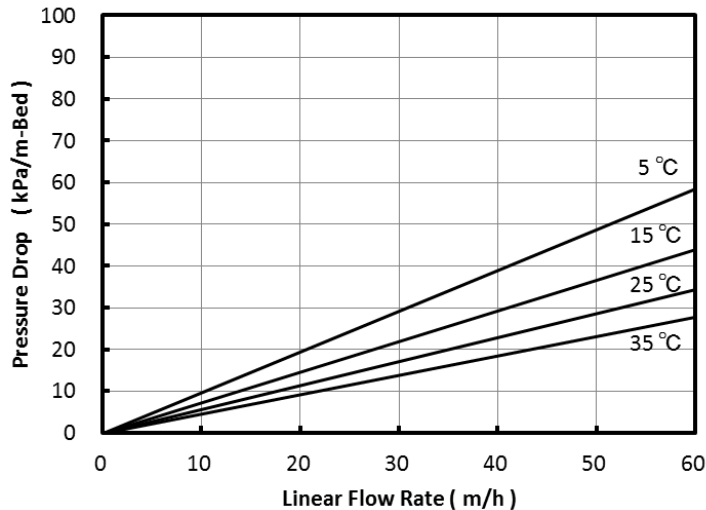


Fig. 1 Pressure Drop of WA30LL

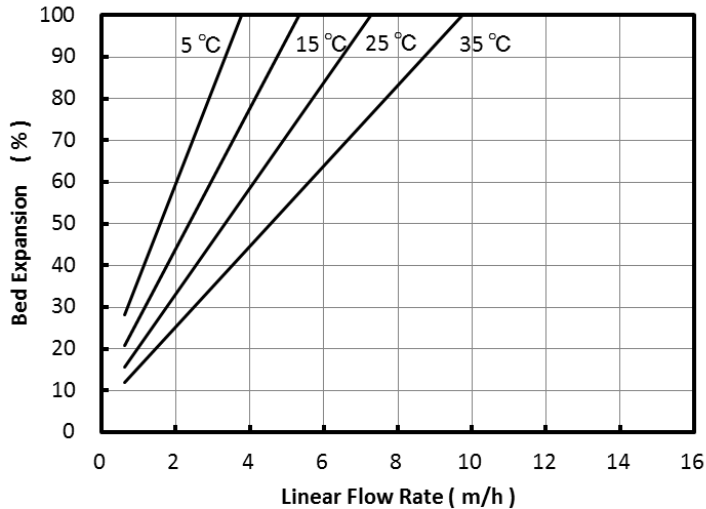


Fig. 2 Bed Expansion of WA30LL

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

