

## Product Data Sheet

**DIAION™ UBK535K**

DIAION™ UBK535K is a high quality uniform particle size cation exchange resin. It has standard crosslinkage and excellent properties for industrial applications. It is recommended for industrial pharmaceuticals, fermentation and food fields.

**Product**

Grade Name	DIAION™ UBK535K	
Type	Strong Acid Cation	
Matrix	Styrene-DVB, Gel	
Functional Group	Sulfonic acid	
Ionic Form	Ca <sup>2+</sup>	

**Specification**

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.7 min.
Water Content	%	47 - 51
Particle Size Distribution 320 - 380 µm	%	90 min.
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion (Ca <sup>2+</sup> )	eq%	98 min.

**Typical Properties**

Shipping Density	g/L	840
Particle Density	g/mL	1.27
Mean Particle Size	µm	350

**Recommended Operating Conditions**


Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14




Phone: 212-204-0075  
 Email: [info@pyvot.tech](mailto:info@pyvot.tech)  
 Web: [www.pyvot.tech](http://www.pyvot.tech)

### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK535K resin in normal down flow operation is shown in the graphs below.

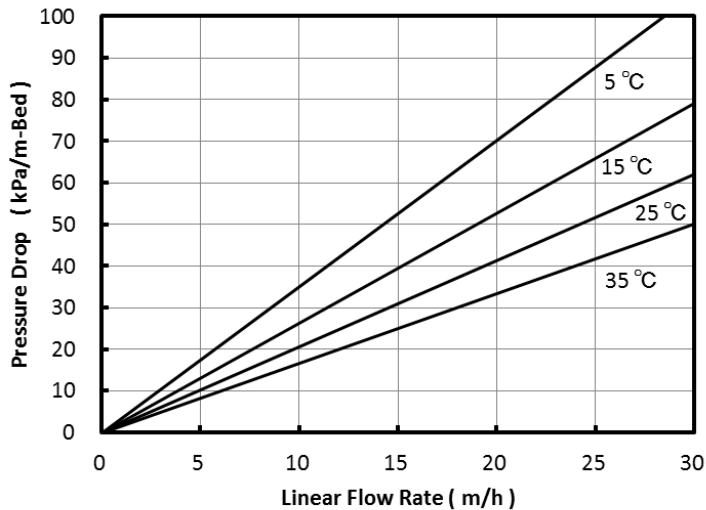

**Fig. 1 Pressure Drop of UBK535K**

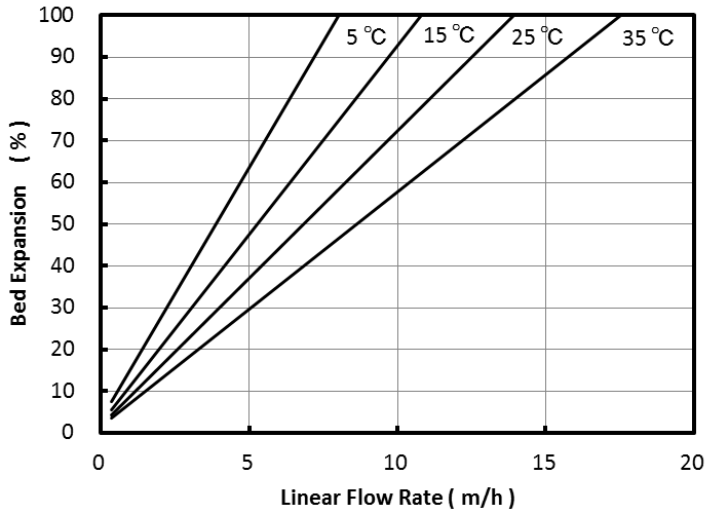

**Fig. 2 Bed Expansion of UBK535K**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

