

Product Data Sheet

DIAION™ WT01S

DIAION™ WT01S is a small particle methacrylic-type weakly acidic cation exchange resin. It has carboxylic acid functionality, and has higher adsorption capacity and reaction rate. A wide range of applications, especially in a field of purification of pharmaceuticals, foods and organic chemicals, is recommended.

Product

Grade Name	DIAION™ WT01S	
Type	Weak Acid Cation	
Matrix	Methacrylic, Porous	
Functional Group	Carboxylic Acid	
Ionic Form	H ⁺	

Specification

Whole Bead Count	-	95 min.
Total Capacity	meq/mL	3.0 min.
Water Content	%	45 - 55
Effective Size	mm	0.10 - 0.14
Uniformity Coefficient	-	1.6 max.

Typical Properties

Shipping Density	g/L	720
Mean Particle Size	µm	230
Particle Density	g/mL	1.14
Total Swelling (H ⁺ to Na ⁺)	%	42

Recommended Operating Conditions

Maximum Operating Temperature	°C	150
Operating pH Range		5 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	5 - 40
Regenerant		HCl
Regenerant Concentration	%	HCl 1 - 5
Regenerant Level	% of ionic load	110
Regenerant Flow Rate	m/h	2 - 6
Total Rinse Requirement	BV	10 - 20

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ WT01S resin in normal down flow operation is shown in the graphs below.

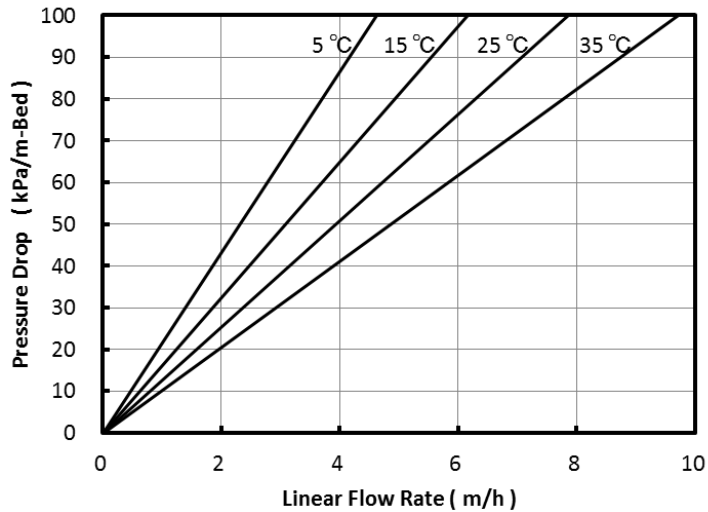


Fig. 1 Pressure Drop of WT01S

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

