

## Product Data Sheet

## DIAION™ UBK10BH

DIAION™ UBK10BH is a cation exchange resin with a uniform particle size. It has 10% cross-linkages and excellent properties. A wide range of applications, especially in a field of condensate polishing for power plants, is recommended.

## Product

Grade Name	DIAION™ UBK10BH
Type	Strong Acid Cation
Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid
Ionic Form	H <sup>+</sup>

## Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	2.0 min.
Water Content	%	40 - 50
Particle Size Distribution 500 - 850 μm	%	95 min.
Particle Size Distribution thr. 500 μm	%	1 max.
Mean Particle Size	μm	650 ± 50
Uniformity Coefficient	-	1.10 max.
Ionic Form Conversion H Form	eq%	99 min.
Ionic Form Conversion Na Form	eq%	0.1 max.

## Typical Properties


Shipping Density	g/L	800
Particle Density	g/mL	1.22
Total Swelling (Na <sup>+</sup> to H <sup>+</sup> )	%	8

## Recommended Operating Conditions


Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	450
Service Flow Rate	m/h	Fast Rinse 5 - 60 Condensate Polishing 40 - 150
Regenerant		HCl H <sub>2</sub> SO <sub>4</sub>
Regenerant Concentration	%	HCl 4 - 8 H <sub>2</sub> SO <sub>4</sub> 1 - 10
Regenerant Level	g/L	30 - 150
Regenerant Flow Rate	m/h	1 - 10
Total Rinse Requirement	BV	3 - 6

### Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK10BH resin in normal down flow operation is shown in the graphs below.

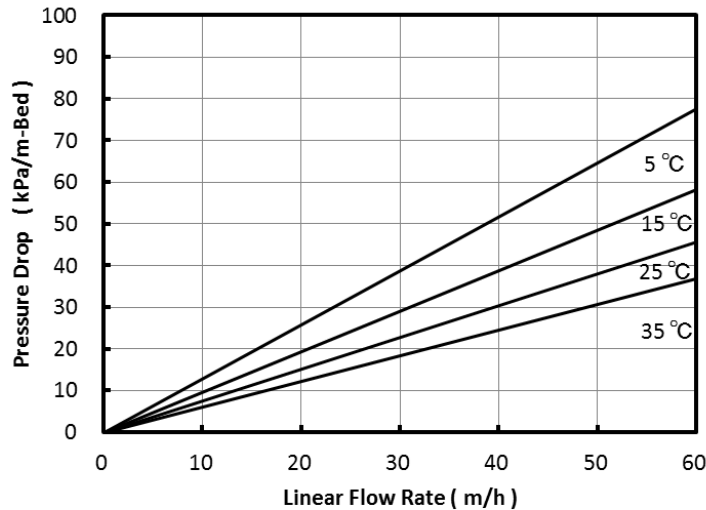

**Fig. 1 Pressure Drop of UBK10BH**

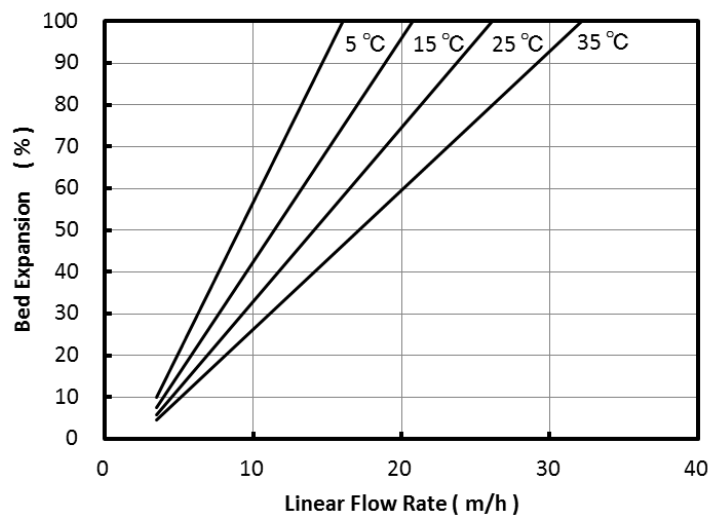

**Fig. 2 Bed Expansion of UBK10BH**

### Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.